
Light Duty Cantilever Racking

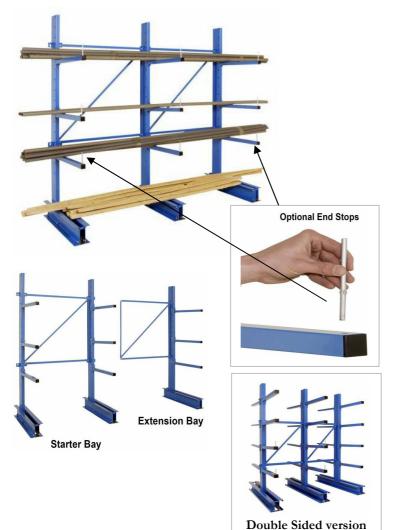

6598w

6599w

Extension

Both

Туре	Bay Type	Description	Duty	Height mm	Width mm	Depth mm
6579w	Starter	Single Sided	Light	2000	1146	645
6580w	Starter	Single Sided	Light	2000	1146	745
6581w	Starter	Single Sided	Light	2000	1146	845
6582w	Starter	Single Sided	Light	2000	1146	945
6583w	Starter	Single Sided	Light	2000	1146	1045
6584w	Extension	Single Sided	Light	2000	1146	645
6585w	Extension	Single Sided	Light	2000	1146	745
6586w	Extension	Single Sided	Light	2000	1146	845
6587w	Extension	Single Sided	Light	2000	1146	945
6588w	Extension	Single Sided	Light	2000	1146	1045
6589w	Starter	Double Sided	Light	2000	1146	940
6590w	Starter	Double Sided	Light	2000	1146	1140
6591w	Starter	Double Sided	Light	2000	1146	1340
6592w	Starter	Double Sided	Light	2000	1146	1540
6593w	Starter	Double Sided	Light	2000	1146	1740
6594w	Extension	Double Sided	Light	2000	1146	940
6595w	Extension	Double Sided	Light	2000	1146	1140
6596w	Extension	Double Sided	Light	2000	1146	1340
6597w	Extension	Double Sided	Light	2000	1146	1540

Double Sided

Optional End Stop

Light

Light

2000

_

1146

_

1740

-

- Keep long lengths of timber, pipe, mouldings or strip metal tidy and easy to access with this great value cantilever racking system.
- You can store up to 240kg on each of the adjustable arms with a maximum total capacity of 960kg for each side of the uprights.
- Made from sturdy powder coated steel, Light Duty Cantilever is offered as single sided racks to go against a wall or double sided for central access front and back.
- A choice of six arm lengths and weight capacities exist as standard.
- Available as Starter and Extension units, this racking is fully modular, so you can add extra sections as you need them.
- Starter units come complete with 6 arms (single sided) and 12 arms (double sided).
- Extension units including 1000mm cross bracing and one upright with arms, simply bolt onto either end of the starter unit to create a continuous run of racking.
- Arms are height adjustable every 100mm and fix to the uprights with steel bolts. Optional steel end stops are also available to prevent items from rolling forward.
- The whole system is delivered flat packed for easy assembly.
- This product should be bolted to a concrete floor for stability and is safe for manual loading only.

Arm Depth

mm 400

500

600

700

800

400

500

600

700

800 400

500 600

700

800 400

500

600

700

800

_

Arm Capacity kg

184

149

124

106

92

184

149

124

106 92

184 149

124

106 92

184

149

124

106

92

-