
Medium Duty Cantilever Racking

Double sided Starter Bay + Extension Bay

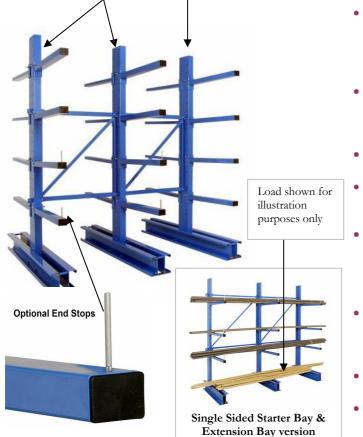

- Perfect for storing lengths of timber, pipe, mouldings or strip metal, this robust cantilever racking system will support up to 1,200kg per level with a maximum total capacity of 1,925kg for each side of the uprights.
- Made from sturdy powder coated steel, Medium Duty Cantilever is offered as single sided racks to go against a wall or double sided for central access front and back.
- A choice of eight arm lengths and weight capacities exist as standard.
- Available as Starter and Extension units, this racking is fully modular, so you can add extra sections as you need them.
- Starter units come complete with 8 arms (single sided) and 16 arms (double sided). Extension units including 1000mm cross bracing and one upright with arms, simply bolt onto either end of the starter unit to create a continuous run of racking.
- Arms are height adjustable every 100mm and fix to the uprights with steel bolts. Optional steel end stops are also available to prevent items from rolling forward.
- The whole system is delivered flat packed for easy assembly.
- This product should be bolted to a concrete floor for stability and is safe for manual loading only.

Tuna	Day Type	Description	Duty	Height	Width	Depth	Arm Depth	Arm Conceity lag
Туре	Bay Type	· ·		mm	mm	mm	<u>mm</u>	Capacity kg
6600w	Starter	Single Sided	Medium	2500	1246	775	500	600
6601w	Starter	Single Sided	Medium	2500	1246	875	600	500
6602w	Starter	Single Sided	Medium	2500	1246	975	700	400
6603w	Starter	Single Sided	Medium	2500	1246	1075	800	350
6604w	Starter	Single Sided	Medium	2500	1246	1275	1000	275
6605w	Starter	Single Sided	Medium	2500	1246	1475	1200	200
6606w	Extension	Single Sided	Medium	2500	1246	775	500	600
6607w	Extension	Single Sided	Medium	2500	1246	875	600	500
6608w	Extension	Single Sided	Medium	2500	1246	975	700	400
6609w	Extension	Single Sided	Medium	2500	1246	1075	800	350
6610w	Extension	Single Sided	Medium	2500	1246	1275	1000	275
6611w	Extension	Single Sided	Medium	2500	1246	1475	1200	200
6612w	Starter	Double Sided	Medium	2500	1246	1200	500	600
6613w	Starter	Double Sided	Medium	2500	1246	1400	600	500
6614w	Starter	Double Sided	Medium	2500	1246	1600	700	400
6615w	Starter	Double Sided	Medium	2500	1246	1800	800	350
6616w	Starter	Double Sided	Medium	2500	1246	2200	1000	275
6617w	Starter	Double Sided	Medium	2500	1246	2600	1200	200
6618w	Extension	Double Sided	Medium	2500	1246	1200	500	600
6619w	Extension	Double Sided	Medium	2500	1246	1400	600	500
6620w	Extension	Double Sided	Medium	2500	1246	1600	700	400
6621w	Extension	Double Sided	Medium	2500	1246	1800	800	350
6622w	Extension	Double Sided	Medium	2500	1246	2200	1000	275
6623w	Extension	Double Sided	Medium	2500	1246	2600	1200	200
6624w	Both	Optional End Stop	Medium	-	-	-	-	-