


# FULLY ELECTRIC PALLET TRUCK



The truck features a very reliable 0.75kw brushless maintenance free driving motor, coupled together with a highly efficient lithium battery giving maximum running time between charges.



To allow the unit to be constantly operated, you also have the option of purchasing extra batteries which are easily interchangeable (within seconds). These allow the truck to be used on a fully charged battery, whilst the spent battery is being charged with the supplied external battery charger.

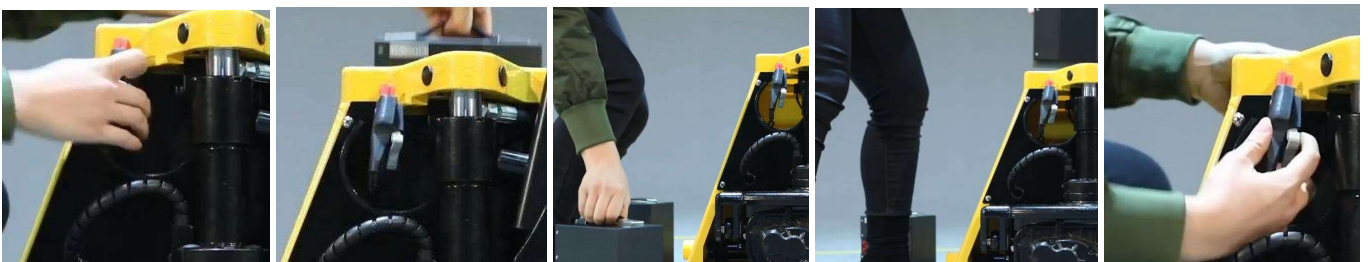

Rated at 1500kg capacity and a slope/climbing gradeability of 4% laden, 10% unladen—this is a powerful machine with average life 3 times greater than a manual pallet truck. Despite this, it's a compact unit, only 32mm longer than a standard pallet truck.

The ergonomic tiller is a multi-function handle, which helps reduce fatigue and will automatically return to the vertical position when released. It features an emergency stop, forward/reverse butterfly switch, lifting/lowering, horn, LED screen displaying battery life.



Features non-marking Polyutherane wheels with Integral double fork wheels—ideal for pallets of open or closed designs

**Invest and Improve your efficiency now, whilst protecting your staff from strains and injury.**

# SPECIFICATION

Type	9790w	9791w
Capacity	1500kg	1500kg
Load centre	600mm	600mm
Fork L x W	1150mm x 550mm	1220mm x 685mm
Fork section W x D	160mm x 58mm	160mm x 58mm
Lowered fork height	82mm	82mm
Raised fork height	197mm	197mm
Overall L x W	1552mm x 550mm	1622mm x 685mm
Overall height with tiller	1276mm	1276mm
Overall height without tiller	520mm	520mm
Minimum radius	1353mm	1353mm
Minimum aisle width required (800 x 1200mm)	1887mm	1887mm
Minimum aisle width required (1000 x 1200mm)	1918mm	1918mm
Maximum travelling speed – laden / unladen	3.5kmh / 4kmh	3.5kmh / 4kmh
Maximum lifting speed – laden / unladen	19kmh / 19kmh	19kmh / 19kmh
Gradeability – laden / unladen	4% / 10%	4% / 10%
Drive (steer) wheel – Polyurethane	130 x 55mm	130 x 55mm
Loading wheel – polyurethane	80 x 70mm	80 x 70mm
Travel motor	DC 0.45kw	DC 0.45kw
Lifting motor	DC 0.5kw	DC 0.5kw
Battery	48v	24v
Charger	10ah lithium	20ah lithium