



Wilmat Limited  
 Wilmat House, 43 Steward Street, Birmingham, B18 7AE  
 T 0121 454 7514 E sales@wilmat-handling.co.uk  
 www.wilmat.co.uk  
 Registered in England No. 6498876


### Electric pallet truck WHME60



### Standard

1.1	Brand		MiMA
1.2	Model		WHME60
1.3	Power type		Battery
1.4	Operation type		Stand on
1.5	Rated capacity	Q(kg)	6000
1.6	Load center	C(mm)	600
1.7	Load distance	x(mm)	980/935
1.8	Wheel base	y(mm)	1525/1480

### Size

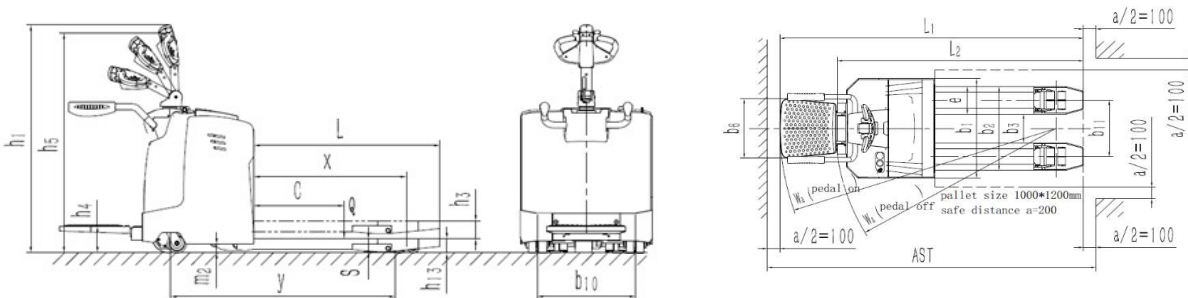

2.1	Overall height	h1(mm)	1420
2.2	Max Lift height of Forks	h2(mm)	110
2.3	Lifting height	h13+h3(mm)	205
2.4	Fork face min.ground clearance	h3(mm)	95
2.5	Pedal height	h4(mm)	180
2.6	Handle Height	h5(mm)	1090~1360
2.7	Overall length,pedal off /on	l1(mm)	1945/2390
2.8	Overall width	b1(mm)	850
2.9	Fork outside size	b2(mm)	715
2.10	Fork size	l/e/s(mm)	1200/255/87
2.11	Body ground clearance	m2(mm)	55
2.12	Aisle width for pallet 1000*1200mm, pedal off/on	Ast(mm)	2250/2690
2.13	Aisle width for pallet 800*1200mm, pedal off/on	Ast(mm)	2300/2740
2.14	Turning radius, pedal off/on	Wa(mm)	1900/2320

<b>Wheels</b>			
3.1	Wheel type		PU
3.2	Load wheel	mm	Φ90×80
3.3	Drive wheel	mm	Φ254×100
3.4	Auxiliary wheel	mm	Φ125×50
3.5	Number of wheels,load/drive(x=drive wheel )		8/1X+4
3.6	Wheel tread, drive side	b10mm)	630
3.7	Wheel tread,load side	b11(mm)	460
<b>Function</b>			
4.1	Driving speed(load/unload)	km/h	4.0/4.5
4.2	Lifting speed(load/unload)	mm/s	29/35
4.3	Lowering speed(load/unload)	mm/s	29/16
4.4	Max.gradeability(load/unload)(S2-5min)	%(tanθ )	4/8
4.5	Brake type		Electromagnetic
<b>Drive</b>			
5.1	Drive motor (S2-60 min)	kw	2.5 (AC)
5.2	Lift motor (S3-15%)	kw	3.0 (DC)
5.3	Battery voltage/ capacity	V/Ah	24/270
5.4	Battery weight	kg	240
5.5	Steering System		EPS
<b>Weight</b>			
6.1	Service weight(incl. battery)	kg	1480
6.2	Axle capacity with full load,drive side/load side	kg	/
6.3	Axle capacity without load,drive side/load side	kg	/
<b>Other</b>			
7.1	Battery replacement type		Hoisting

- Note:
1. The above table is the standard model data, which will be changed according to the different configuration; model upgrade and optimization will also lead to local structure and partial size changes;
  2. Optional configuration and non-standard customization:
    - ① The length, width, and outer distance of the fork;
    - ② Warp beam truck (fork and inclined plane);
    - ③ Side-pull batteries, batteries of different capacities;