



Electric Tow Tractor WHMG30



Standard

1.1	Manufacturer		MiMA
1.2	Model		WHMG30
1.3	Power unit		Battery
1.4	Operation		Stand-on
1.5	Capacity	kg	3000kg
1.6	Wheelbase	y(mm)	975

Product Size

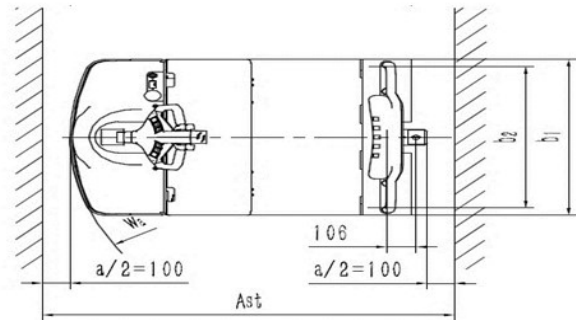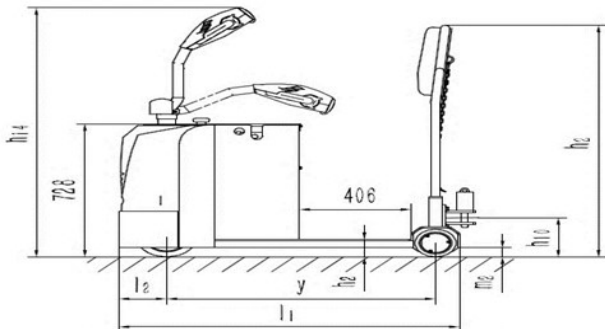


Size

2.1	Overall height	h14	1480
2.2	Towing coupling height	h10(mm)	140-240
2.3	Stand height	h2(mm)	97
2.4	Overall length	l1(mm)	1300
2.5	Overall width	b1(mm)	850
2.6	Ground clearance, centre of wheelbase	m2(mm)	50
2.7	Turning radius	Wa(mm)	1160

Wheel

3.1	Wheel type		Rubber
3.2	Tyre size, drive	mm	Φ230×70
3.3	Tyre size, load	mm	Φ150×60
3.4	Wheels number, front/back (x=driven)		1X/2
3.5	Tread, load	b2(mm)	770

Performance Graph

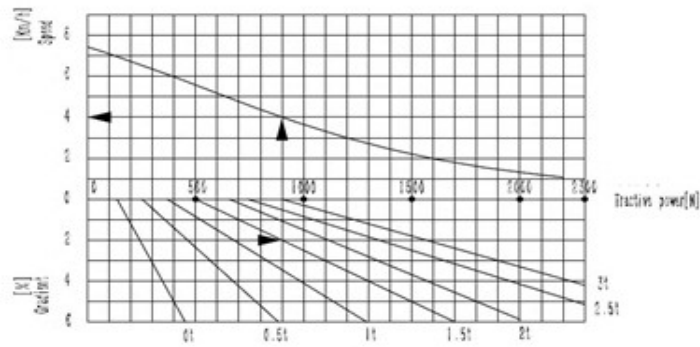

Function

4.1	Travel speed, with/without load	km/h	See graph
4.2	Rated drawbar pull	F(N)	750
4.3	Max. climbing ability, with/without load (S2-5min)	%(tan θ)	See graph
4.4	Service brake		Electromagnetic

Drive

5.1	Drive motor rating (S2-60 min)	kw	1.5(AC)
5.2	Battery voltage/rated capacity	V/Ah	24/210
5.3	Steering System		Mechanical

Weight

6.1	Service weight(with battery)	kg	550
6.2	Axle loading, unladen drive/load	kg	350/200
6.3	Battery weight	kg	200

Other

7.1	Battery replacement		Hoisting
-----	---------------------	--	----------

Remark [1]: The standard model data would vary according to the configuration

- ① Battery voltage: 140-280AH
- ② Battery replacement: Side pull
- ③ Steering system: EPS